




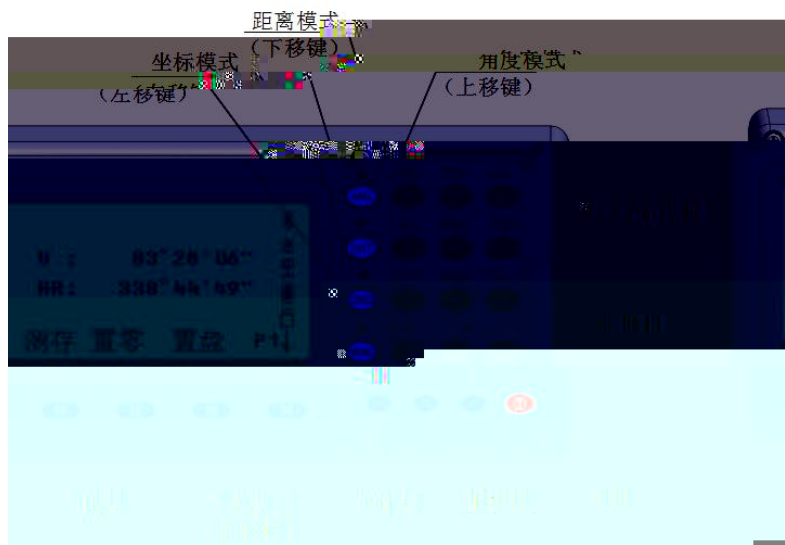

反射器 : [无棱镜] → *
 对中器 : 2 ← *
 对比度 : 10 ↑ *
 十字照明 : 0 ↓ *
 照明 补偿 指向 参数

温度 : 20.0 °C *
 气压 : 1013.0 hPa *
 棱镜常数 : 0.0 mm *
 PPM 值 : 0.0 ppm *
 回

测距模式 *
 1. 单次 *
 2. 3 次 *
 3. 重复 *

格网因子
 = 1.000000
 高程 : 0.000 m
 比例因子 : 1.000000
 回退 确认

		测站点: STN 编 号: NO: 2448384.867 m E0: 432864.978 m Z0: 0.000 m 回退 调用 数字 确认
		设置测站点 记录测站坐标? [否] [是]
		输入仪器高 仪器高: 1.500 
		后视点: BS 编 号: NBS: 2448384.611 m EBS: 432868.715 m ZBS: 3.711 m 回退 调用 数字 确认
		设置后视点 记录后视坐标? [否] [是]

新点
点 1 → 1
编 码 :
仪器高: 1.500 m
输入 调

新点
点 1 → STN
编 码 :
仪器高: 1.500 m
回退 调用 字母 确认

后方交会
第 1 点
点 名 :
调用 坐标 确认

后方交会
第 1 点
N : 0.000
E : 0.000
Z : 0.000
回退 点

输入目标高

目标

第 1 点

U : 91°19'21"

HR : 45°16'59"

斜距

后方交会

第 2 点

点 名 : 10

输入 调用 坐标 确认

第 2 点

U : 86°21'10"


HR : 10°56'09"



斜距



目标高 : 1.600 m


>照准 ?

		后方交会 第 3 点 点 名 : 11 输入 调用
		后方交会 NO: 2448359.088 m EO: 432759.215 m ZO: 6.1 m > 设置 ? [否] [是]

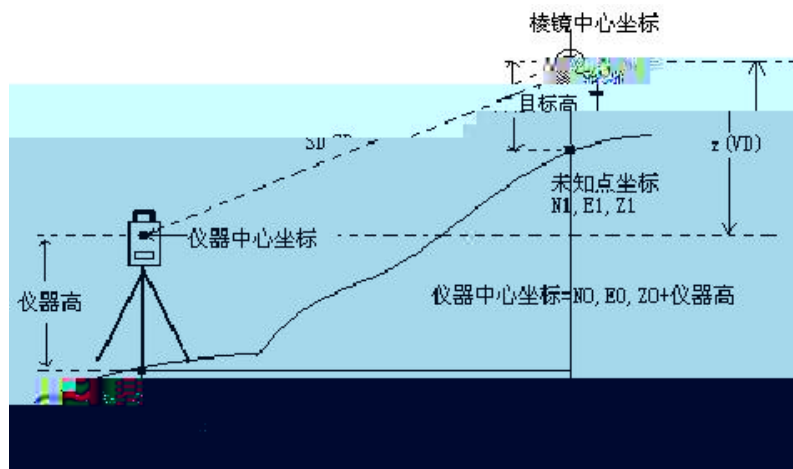



		
		
		


		
		
		 
		
		

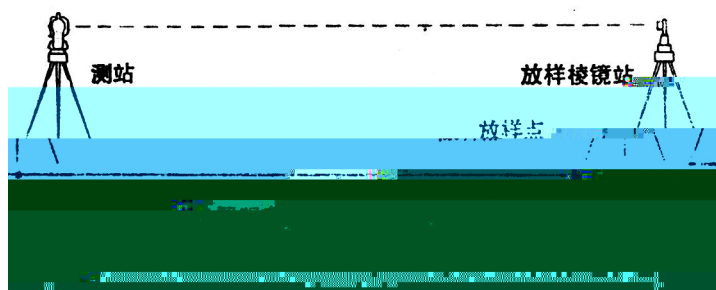

		<p>菜单</p>
		<p>工作文件</p> <p>文件 20201010</p> <p>回退 调用 数字 确认</p> <p>选择 调用文件</p> <p>文件名: 2020101</p> <p>回退 调用</p>

		放样 富源网站占 2. 设置后
		点名 : 36 编码 : 点 N : 2448383.474 点 E : 432868.443 点 Z : 3.704 回退 调用 数字 确
		放样 计算值 HR= 111°53'48" HD= 3.735 m 距离 坐 标 指 挥
		HR: 111°53'47" dHR= -0°00'01" 平距: 3.735 m dHD: -0.000 m dZ: 0.000 m 测量 模式 标高 下

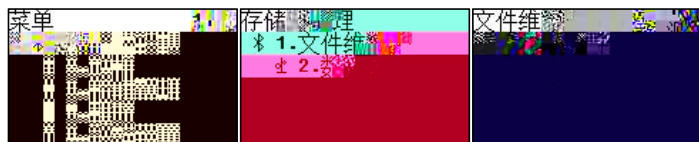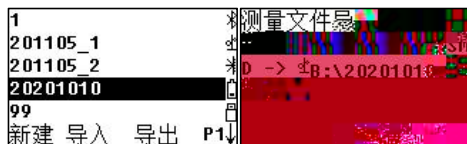


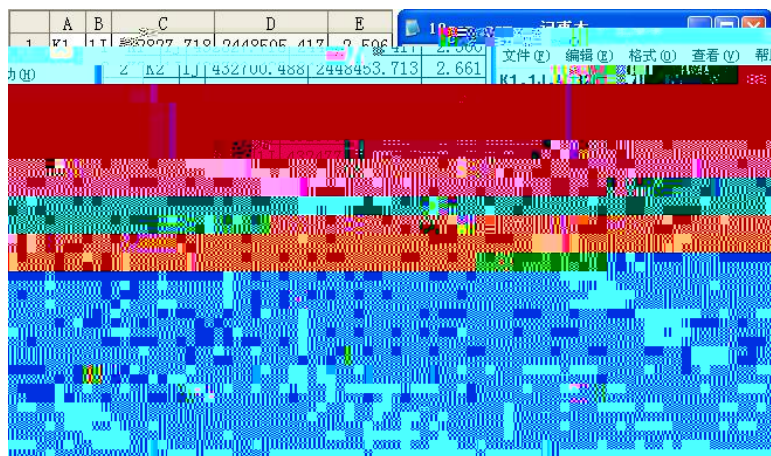



设备
蓝牙、打印机、鼠标

蓝牙

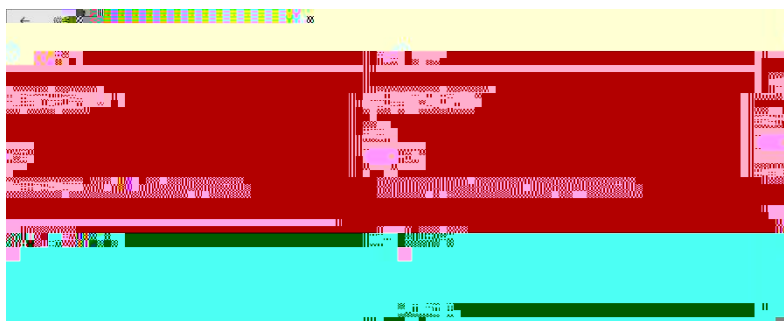

配对

下一步(N)

